

# HSLH JB/OB 300/500V Cca

CPR Class



DOP Number



MULTISTANDARD  
CABLES

CONTROL  
CABLES

DATA  
CABLES


ENERGY  
CABLES

SPECIAL  
CABLES

SHIELDED  
CABLES

ARMOURED  
CABLES

UTILITIES

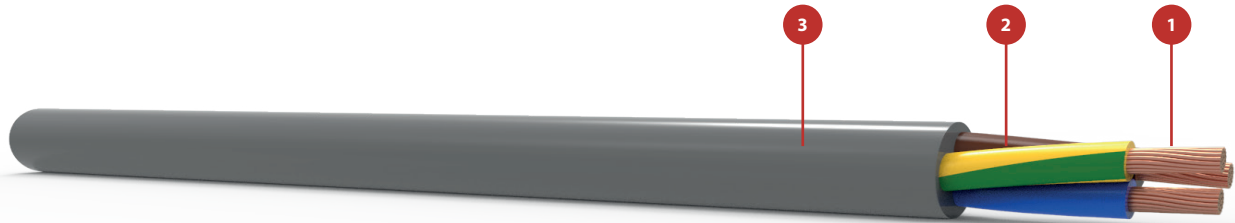

PRIVO DI ALOGENI  
HALOGEN FREE

## IMPIEGO APPROPRIATO / APPROPRIATE USE

Impiegato per il trasporto di segnali in luoghi pubblici, aeroporti e stazioni ferroviarie. Senza alogeni e a bassa emissione di fumi.  
Suitable for transmission of signals in public places, airports and railway stations. Halogen free cable with low smoke emission.

	CARATTERISTICHE/ CHARACTERISTICS	DESCRIZIONE/ DESCRIPTION	NORME/ REFERENCE
	Tipo di cavo Type of cable	HSLH JZ/OZ	
	Tensione nominale Nominal Voltage	U <sub>0</sub> /U 300/500 V	
1	Conduttore Core	Flessibile di rame rosso ricotto classe 5 Class 5 flexible annealed red copper	EN 60228
2	Isolamento Insulation	Termoplastica LSOH T16 Thermoplastic LSOH T16	EN 50363
3	Guaina Sheath	Termoplastica LSOH TM7, colore grigio RAL 7001 Thermoplastic LSOH TM7, grey colour RAL 7001	EN 50363
	Campo di temperatura Temperature range	Posa fissa: da -40°C a +80°C, posa mobile: da -30°C a +70°C Fixed laying: from -40°C to +80°C, mobile laying: from -30°C to +70°C	
	Temperatura massima di corto circuito Maximum short circuit temperature	150°C	
	Tensione di prova Testing voltage	4000V AC	
	Raggio minimo di curvatura Minimum banding radius	Posa fissa: 4 x diametro esterno - Posa mobile: 10 x diametro esterno Fixed laying: 4 x external diameter - Mobile laying: 10 x external diameter	
	Imballo Package	Matasse mt.100 in termoretraibile - Bobine 100 m thermo-shrinking material coils - Drums	

## NORME RIF. GENERALI / GENERAL REFERENCE

EN 50525-2-1, EN 50525-3-11, EN 50575:2014 + EN 50575/A1:2016

## IDENTIFICAZIONE CONDUTTORI / CORE IDENTIFICATION

Colorate (VDE 0293-308)  
Coloured cores (VDE 0293-308)

# HSLH JB/OB 300/500V Cca

Sezione 0.50 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
2 x 0.50	4.8	43	9.6
3 x 0.50	5.1	50	14.4
4 x 0.50	5.7	60	19.0
5 x 0.50	6.2	71	24.0
7 x 0.50	7.4	84	33.6
12 x 0.50	9.1	142	58.0
18 x 0.50	10.7	204	86.0
25 x 0.50	12.7	283	120.0

Sezione 0.75 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
2 x 0.75	5.2	47	14.4
3 x 0.75	5.5	56	21.6
4 x 0.75	6.2	69	29.0
5 x 0.75	6.8	83	36.0
7 x 0.75	8.1	114	50.0
12 x 0.75	9.9	183	86.0
18 x 0.75	11.9	266	130.0
25 x 0.75	14.1	374	180.0

Sezione 1 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
2 x 1	5.5	63	19.2
3 x 1	6.0	74	29.0
4 x 1	6.6	90	38.4
5 x 1	7.2	109	48.0
7 x 1	8.6	151	67.0
12 x 1	10.7	243	115.0
18 x 1	12.7	361	173.0
25 x 1	15.2	496	240.0

Sezione 1.5 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
2 x 1.5	6.3	70	29.0
3 x 1.5	6.7	94	43.0
4 x 1.5	7.3	112	58.0
5 x 1.5	8.2	141	72.0
7 x 1.5	9.8	191	101.0
10 x 1.5	11.7	282	144.0
12 x 1.5	12.1	311	173.0
18 x 1.5	14.5	450	259.0
25 x 1.5	17.8	630	360.0

Sezione 2.5 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
2 x 2.5	7.6	118	48.0
3 x 2.5	8.3	151	72.0
4 x 2.5	9.1	181	96.0
5 x 2.5	10.2	224	120.0
7 x 2.5	12.1	316	168.0
12 x 2.5	15.2	499	288.0
18 x 2.5	18.1	769	432.0
25 x 2.5	22.2	1047	600.0

Sezione 4 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
3 x 4	9.9	247	115.0
4 x 4	11.0	299	154.0
5 x 4	12.1	369	192.0
7 x 4	13.3	463	269.0

MULTISTANDARD  
CABLES

CONTROL  
CABLES

DATA  
CABLES

ENERGY  
CABLES

SPECIAL  
CABLES

SHIELDED  
CABLES

ARMoured  
CABLES

UTILITIES

MULTISTANDARD  
CABLES

CONTROL  
CABLES

DATA  
CABLES

ENERGY  
CABLES

SPECIAL  
CABLES

SHIELDED  
CABLES

ARMOURED  
CABLES

UTILITIES

Sezione 6 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
3 x 6	11.7	360	173.0
4 x 6	13.0	429	230.0
5 x 6	14.5	529	288.0
7 x 6	16.0	631	403.0

Sezione 10 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
4 x 10	16.8	708	384.0
5 x 10	18.7	862	480.0
7 x 10	20.6	1124	672.0

Sezione 16 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
4 x 16	19.7	1060	614.0
5 x 16	21.9	1270	768.0

Sezione 25 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
4 x 25	25.2	1594	960.0
5 x 25	27.9	2014	1200.0

Sezione 35 mm <sup>2</sup>			
Formazione Construction	Diametro esterno indicativo Approximate external diameter	Peso indicativo cavo Approximate cable weight	Peso Rame Copper weight
n x mm <sup>2</sup>	mm	kg/km	kg/km
4 x 35	28.0	2200	1344.0